SAROVAR

M.G. Rajashekhar
Hydro Geologist M.Sc, (Geo), D.E.G., FGS
Ground Water & Rain Water Harvesting Consultant

Yield report

6 1/2" dia borewell drilled at BBMP premises: 10, Byrappa garden layout, Ramakrishnapura, Bang

Yield test carried out and found to be 3 hp

Sarathe. N K
AE W10

Assistant Executive Engineer
Vidyaranyapura Sub Division
BBMP, Bangalore - 97

359, 13th Cross, 3rd Block, BEL Layout, Vidyaranyapuram, Bangalore-560 097.
Tel : +91-80-23644118 Mobile : 9880099118 Email : mgthimma@gmail.com

ROUND WATER SURVEY REPORT

~~OPEN WELL~~ / BOREWELL
~~DATA~~ OF SURVEY

Name of the Party : BBMP ward NO: 10

Location of the Site : Byrappa garden, Hydrabad Road, Bangalore.

Area of the land :

INVESTIGATION REPORT

GEOLOGY OF THE AREA : Clayey, granite gneiss formation

Recommended Site for drilling : W1

Total depth to be drilled : 1200' - 1600'

Approx. casing pipe required : 200' - 250'

No. of water bearing Zones : - 4 -

No. of favorable spots marked : - 1 -

Qty. of water expected : 2" - 3"

Method of survey carried out : Geophysical Method

Remarks : 6 1/2" dia borewell at W1

Yield Recommended 640' - 1300'

T.O. : Terms & Conditions

HYDROGEOLOGIST
(M.G. RAJASHEKHAR, M.Sc., DEG., F.G.S.)

Suvetha. N K
AE 010

Assistant Executive Engineer
Vidyaranyapura Sub Division
BBMP, Bangalore - 97

BOREWELL SITE PLAN

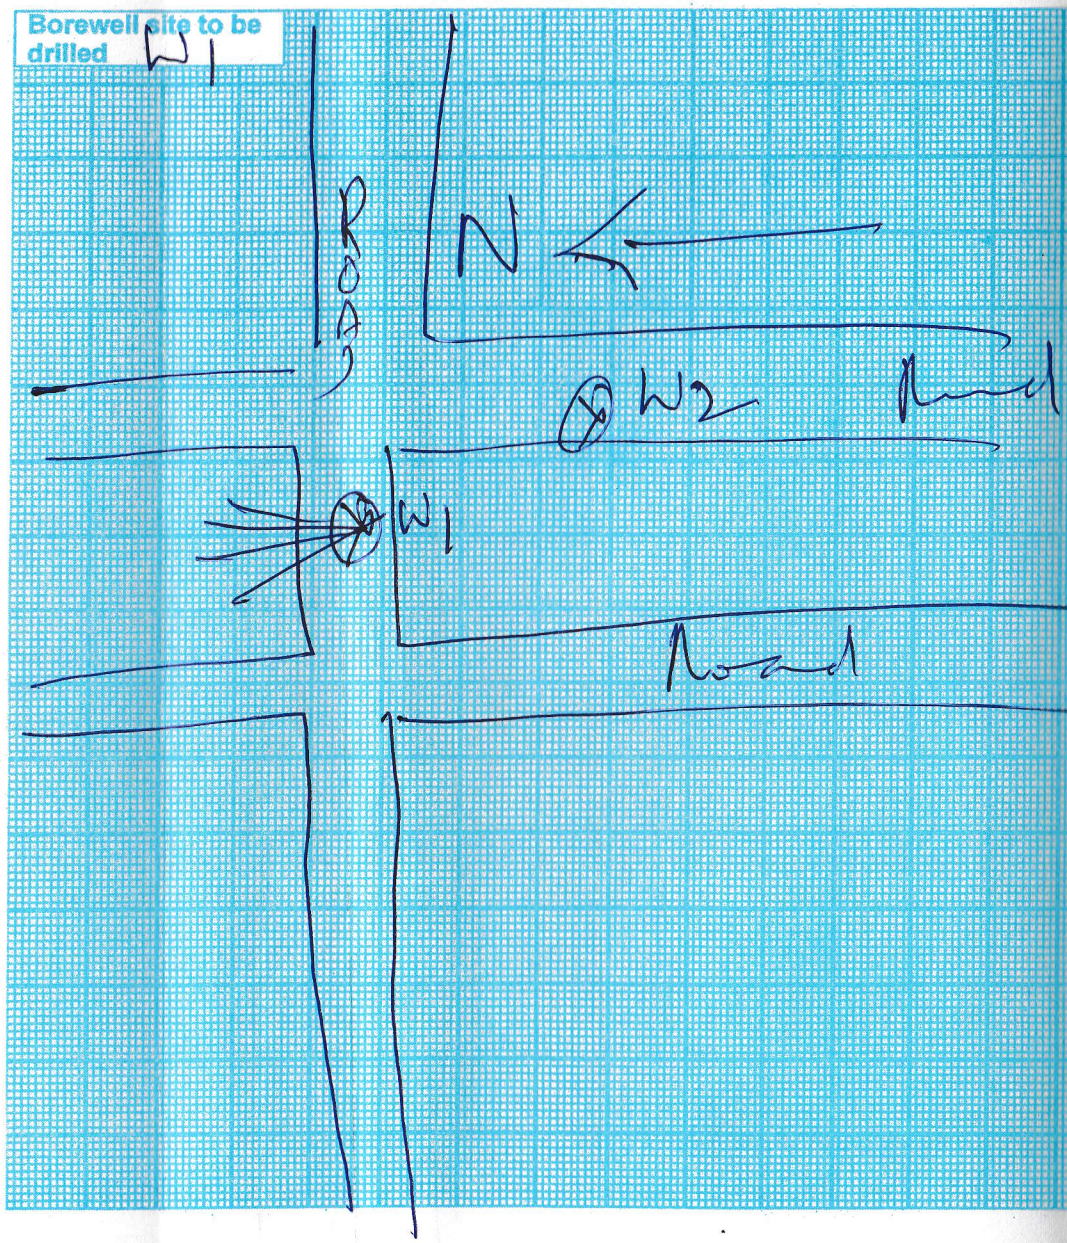

SAROVAR

M.G. Rajashekhar
Hydro Geologist M.Sc, (Geo), D.E.G., FGS
Ground Water & Rain Water Harvesting Consultant

Yield Report-

6 ½" dia bore well drilled at BBMP no 10, 12th cross Nanjappalayout, Doddanekundi

Yield test carried out and found to be 3 lps

Suvetha. N.K
AE W10

Assistant Executive Engineer
Vidyaranyapura Sub Division
BBMP, Bangalore-97

359, 13th Cross, 3rd Block, BEL Layout, Vidyaranyapuram, Bangalore-560 097.
Tel : +91-80-23644118 Mobile : 9880099118 Email : mgthimma@gmail.com

GROUND WATER SURVEY REPORT

~~OPEN WELL~~ / BOREWELL
DATA OF SURVEY

a) Name of the Party : BBMP Ward No. 10

b) Location of the Site : 12th Cross Nanjappa Layout

c) Area of the land : Doddakunda,

INVESTIGATION REPORT

1) GEOLOGY OF THE AREA : Clayey, granite, tuff

) Recommended Site for drilling : W1

) Total depth to be drilled : 1200'-1300'

) Approx. casing pipe required : 200'-240'

) No. of water bearing Zones : 4

No. of favorable spots marked : 1

Qty. of water expected : 2"-3"

Method of survey carried out : Geo hydrological

Remarks : 6½" dia bore at W1

Yield from other bore wells 640'-1250'

HYDROGEOLOGIST
(M.G. RAJASHEKHAR, M.Sc., DEG., F.G.S.)

T.O. : Terms & Conditions

Sujatha. N.K
AE W10

Assistant Executive Engineer
Vidyaranyapura Sub Division
BBMP, Bangalore - 97

BOREWELL SITE PLAN

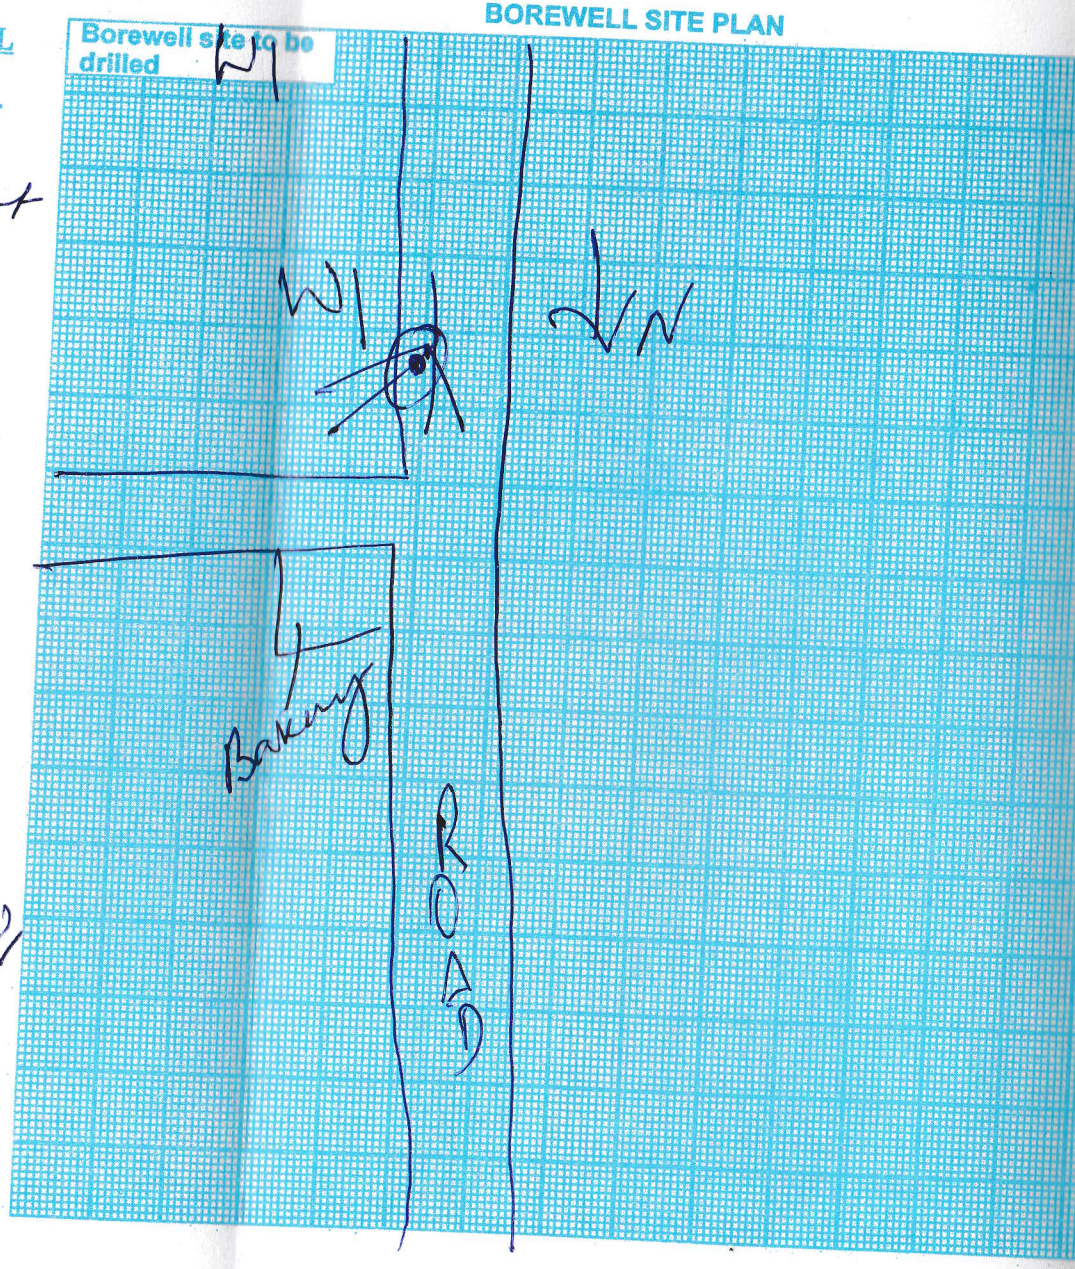

SAROVAR

M.G. Rajashekhar
Hydro Geologist M.Sc, (Geo), D.E.G., FGS
Ground Water & Rain Water Harvesting Consultant

Bore yield report

6 1/2" dia borewell at BBMP
Site No: 10 Venkateshwara Layout
Venkateshwara Temple Road
Kodathanda, Blr

Yield test carried out and found
to be 3 lps

Suretha. KL
AE W10

Assistant Executive Engineer
Vidyaranyapura Sub Division
BBMP, Bangalore - 97

359, 13th Cross, 3rd Block, BEL Layout, Vidyaranyapuram, Bangalore-560 097.
Tel : +91-80-23644118 Mobile : 9880099118 Email : mgthimma@gmail.com

GROUND WATER SURVEY REPORT

~~OPEN WELL~~ / BOREWELL
DATE OF SURVEY 1/9/20

a) Name of the Party : BBMP Wardno: 10,
b) Location of the Site : Venkateswara layout
c) Area of the land : Venkateshwara temple Road Doddabommasandra

INVESTIGATION REPORT

1) GEOLOGY OF THE AREA : Laterite, Charnockite, granite gneiss

2) Recommended Site for drilling : W1
3) Total depth to be drilled : 1000-1200'
4) Approx. casing pipe required : 170'-200'
5) No. of water bearing Zones : -4-
6) No. of favorable spots marked : -1-
7) Qty. of water expected : 2½" & 3"
8) Method of survey carried out : Dr Sidhia boomerang
9) Remarks : Water zones are 440'-1100'

HYDROGEOLOGIST
(M.G. RAJASHEKHAR, M.Sc., DEG., F.G.S.)

P.T.O. : Terms & Conditions

Suresh-XL
AE 610

Assistant Executive Engineer
Vidyaranyapura Sub Division
BBMP, Bangalore - 97

AE 610

BOREWELL SITE PLAN

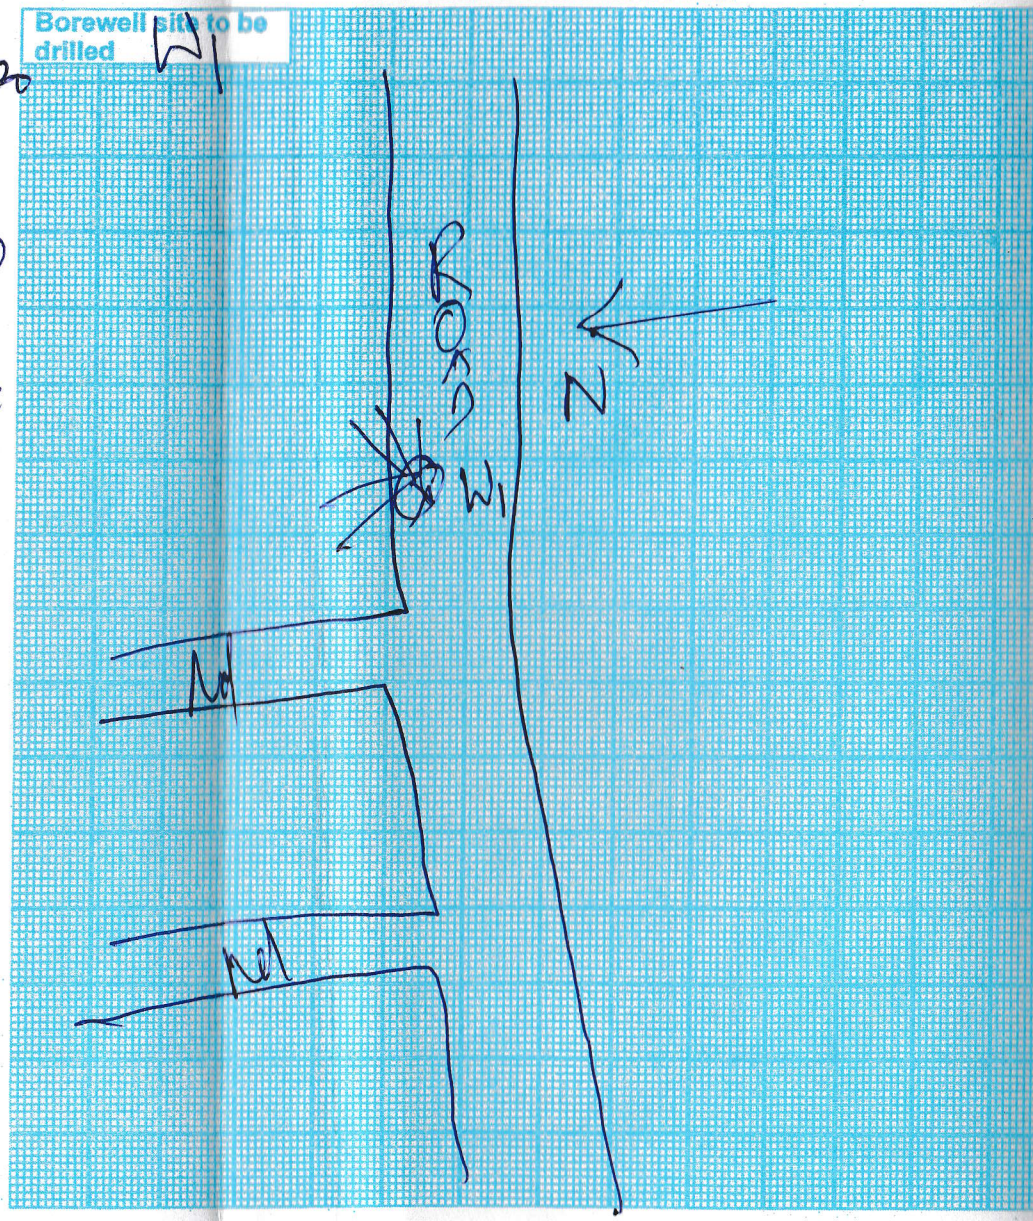

SAROVAR

M.G. Rajashekhar
Hydro Geologist M.Sc, (Geo), D.E.G., FGS
Ground Water & Rain Water Harvesting Consultant

Yield Report

6 1/2" dia bore well drilled at
BBMP premises No. 10, Ward office
4th cross, BEL layout
Vidyapeeta

Yield test Carried out and
found to be 3 lps

Suvetha. N C
AE, DIO

Assistant Executive Engineer
Vidyaranyapura Sub Division
BBMP, Bangalore - 97

359, 13th Cross, 3rd Block, BEL Layout, Vidyaranyapuram, Bangalore-560 097.
Tel : +91-80-23644118 Mobile : 9880099118 Email : mgthimma@gmail.com

GROUND WATER SURVEY REPORT

~~OPEN WELL / BOREWELL~~
DATE OF SURVEY

a) Name of the Party : BBMP. Hd. Office

b) Location of the Site : Ward No. 10, 4th Cross, Ward 990

c) Area of the land :

INVESTIGATION REPORT

1) GEOLOGY OF THE AREA : Clayey, Laterite gneissic

2) Recommended Site for drilling : W1

3) Total depth to be drilled : 1200-1300'

4) Approx. casing pipe required : 180'-220'

5) No. of water bearing Zones : 4

6) No. of favorable spots marked : 1

7) Qty. of water expected : 2"-3"

8) Method of survey carried out : Percussion Rotary

9) Remarks : 6½" dia Bore well at W1

Water Source at 640'-1280'

T.O. : Terms & Conditions

HYDROGEOLOGIST
(M.G. RAJASHEKHAR, M.Sc., DEG., F.G.S.)

Suvetha-NK
AE/JO

Assistant Executive Engineer
Vidyaranyapura Sub Division
BBMP, Bangalore-97

BOREWELL SITE PLAN